BIMETAL CABLE LUG

Application:

Used for transition connection of aluminium cable or aluminium alloy cable with copper end of electrical equipment in medium voltage, from 16 to 300 mm²






Material: Al ≥ 99.5%, Cu ≥ 99.9%

Feature:
• Oil blocking structure
• Friction welded
• Clear markings on barrel to indicate correct crimping location, together with Melec standard crimping die.

Standard: IEC61238-1:2003

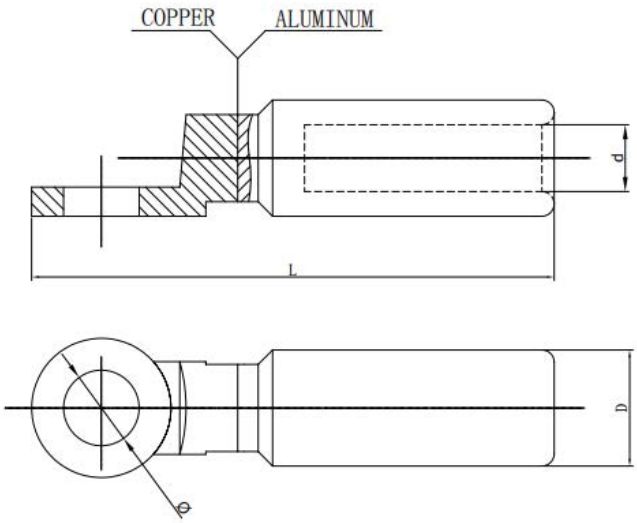

TYPE	D±0.5	d±0.3	L±3.0	Φ±0.3
16mm2	16	6	80	11
25mm2	16	7	80	11
35mm2	16	8.5	80	11
50mm2	20	10	90	13
70mm2	20	11.5	90	13
95mm2	20	13.5	90	13
120mm2	25	15.0	115	13
150mm2	25	16.5	115	13
185mm2	32	18.5	122	13
240mm2	32	21.0	122	13
300mm2	34	23.5	130	13