CABLE JOINT


Application:
Used for connection of copper cable with copper end of electrical equipment in low voltage

Material: Cu ≥ 99.9%

Surface: tin plated

Feature:
Hole inspection for easy installation.

Standard: DIN 46267

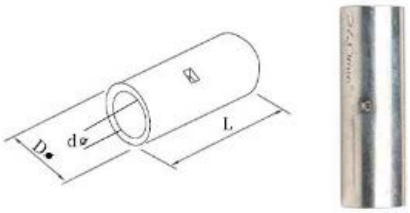

Type	Conductor Size (mm^2)	Dimensions		
		L(mm)	d(mm)	D(mm)
GTY-N120	120	70	15.5	21